



PC Board $\Phi 2.6$

Crimp Terminal

$\Phi 2.6$ Series

FEATURES & BENEFITS:

- Stand-Alone, Board-In
- Secures wire to PC board before wave soldering
- Rapid and economical means of hand wiring PC board
- Wire solders directly to PC board
- No additional contact resistance
- Low profile
- Recommended PC board hole diameter
 $\Phi 2.6 \pm 0.1/-0$ for 1.60 ± 0.1 mm thick PC board

SPECIFICATION:



+ Physical:

- Contact: Brass or Phosphor Bronze
- Plating: Pre. Tin over Copper
Post Tin over Copper

REFERENCE INFORMATION:

- Package: Reel
- Designed in : mm

ORDERING INFORMATION AND DIMENSIONS:

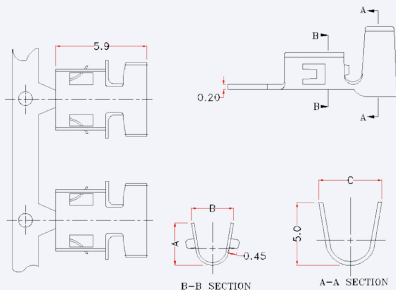

Part No.	Material	Plated	PCB Hole	PCB Thickness	Wire Range	A	B	C
T6625-76	Phosphor Bronze	Post Tin-Plated	Φ2.6	1.60	#18~20	3.0	3.0	5.3
T6625-76H					#16*2	3.4	3.3	5.5
T6625-36	Brass	Post Tin-Plated			#18~20	3.0	3.0	5.3
T6625-36H					#16*2	3.4	3.3	5.5