



PC Board $\Phi 2.2$

Crimp Terminal

$\Phi 2.2$ Series

FEATURES & BENEFITS:

- Stand-Alone, Board-In
- Secures wire to PC board before wave soldering
- Rapid and economical means of hand wiring PC board
- Wire solders directly to PC board
- No additional contact resistance
- Low profile
- Recommended PC board hole diameter
 $\Phi 2.2 + 0.1/-0$ for 1.60 ± 0.1 mm thick PC board

SPECIFICATION:


+ Physical:

- Contact: Brass or Phosphor Bronze
- Plating: Pre. Tin over Copper
Post Tin over Copper

REFERENCE INFORMATION:

- Package: Reel
- Designed in : mm

ORDERING INFORMATION AND DIMENSIONS:

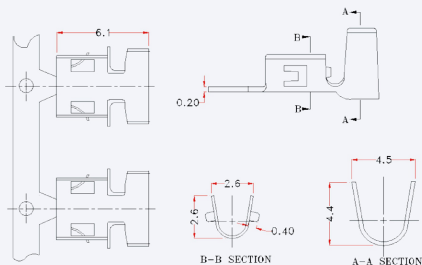

Part No.	Material	Plated	PCB Hole	PCB Thickness	Wire Range
T6625-12	Brass	Post Tin-Plated	$\Phi 2.2$	1.60	AWG16-18
T6625-32	Brass	Pre. Tin-Plated			
T6625-52	Phosphor Bronze	Post Tin-Plated			
T6625-72	Phosphor Bronze	Pre. Tin-Plated			