

### FEATURES & BENEFITS:


- Stand-Alone, Board-in.
- Secures wire to PC board before wave soldering.
- Rapid and economical means of hand wiring PC board.
- Wire solders directly to PC board.
- No additional contact Resistance.
- Low profile.
- Recommended PC board Hole diameter:  $\varnothing 1.60 \pm 0.1/-0$ mm for 1.60 $\pm$ 0.10mm thick PC board.

### SPECIFICATION:

- Material: Phosphor Bronze/Brass.
- Plating: Post-tin over copper


### REFERENCE INFORMATION:

- Package: Reel.
- Designed in :mm



### ORDERING INFORMATION AND DIMENSIONS:

#### Terminal:

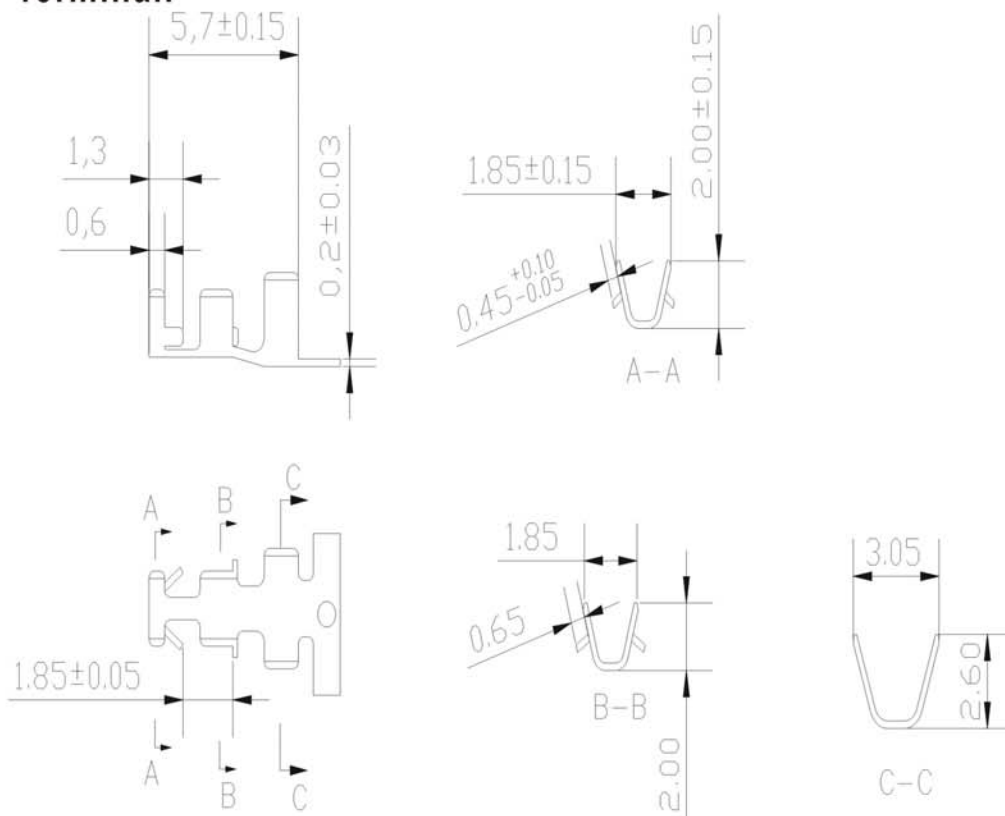

| Part Number | Material        | Plated   | Wire Range |
|-------------|-----------------|----------|------------|
| T6616-12    | Brass           | Post-Tin |            |
| T6616-52    | Phosphor Bronze | Post-Tin | #22~26     |