



PC Board $\Phi 1.8$

Crimp Terminal

$\Phi 1.8$ Series

FEATURES & BENEFITS:

- Stand-Alone, Board-In
- Secures wire to PC board before wave soldering
- Rapid and economical means of hand wiring PC board
- Wire solders directly to PC board
- No additional contact resistance
- Low profile
- Recommended PC board hole diameter
 $\Phi 1.8 + 0.1/-0$ for 1.60 ± 0.1 mm thick PC board

SPECIFICATION:


+ Physical:

- Contact: Brass or Phosphor Bronze
- Plating: Pre. Tin over Copper
Post Tin over Copper

REFERENCE INFORMATION:

- Package: Reel
- Designed in : mm

ORDERING INFORMATION AND DIMENSIONS:

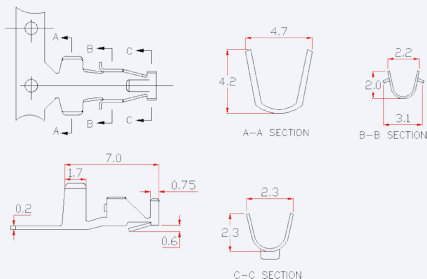



Part No.	Material	Finished	Wire AWG	PCB Hole	PCB Thickness
T6652-12	Brass	Post Tin-plated	#18~#22	$\Phi 1.8$	1.60
T6652-32		Pre. Tin-plated			

PC Board $\Phi 1.8$


Crimp Terminal

$\Phi 1.8$ Series

ORDERING INFORMATION AND DIMENSIONS:

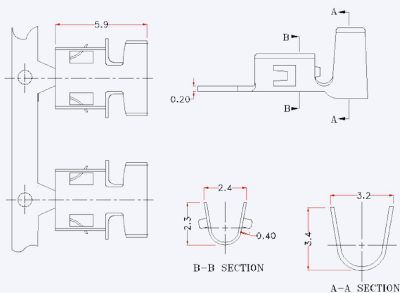

Part No.	Material	Finished	Wire AWG	PCB Hole	PCB Thickness
T6652-52	Phosphor Brass	Post Tin-plated	AWG18~22	$\Phi 1.8$	1.60
T6652-72		Pre. Tin-plated			

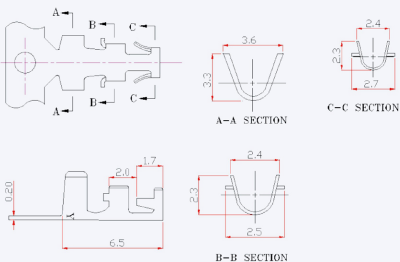

Part No.	Material	Finished	Wire Range	PCB Hole	PCB Thickness
T6652-75	Phosphor Bronze	Pre. Tin-plated	AWG18~22	$\Phi 1.8$	1.60
T6652-55	Phosphor Bronze	Post Tin-plated			
T6652-35	Brass	Pre. Tin-plated			
T6652-15	Brass	Post Tin-plated			





PC Board $\Phi 1.8$


Crimp Terminal

$\Phi 1.8$ Series


ORDERING INFORMATION AND DIMENSIONS:



A-A SECTION



B-B SECTION



Part No.	Material	Finished	Wire Range	PCB Hole	PCB Thickness
T6621-16	Brass	Post Tin-plated	AWG#18-#22	$\Phi 1.8$	1.60
T6621-36	Brass	Pre. Tin-plated			
T6621-56	Phosphor Bronze	Post Tin-plated			
T6621-76	Phosphor Bronze	Pre. Tin-plated			